

Design and evaluation of a continuous interface for real-time self-reporting of VR sickness

Maria Plaza*
mplaza@unizar.es

Universidad de Zaragoza - I3A
Zaragoza, Spain

Ana Serrano

Universidad de Zaragoza - I3A
Zaragoza, Spain

Carmen Real*
creal@unizar.es

Universidad de Zaragoza - I3A
Zaragoza, Spain

Diego Gutierrez

Universidad de Zaragoza - I3A
Zaragoza, Spain

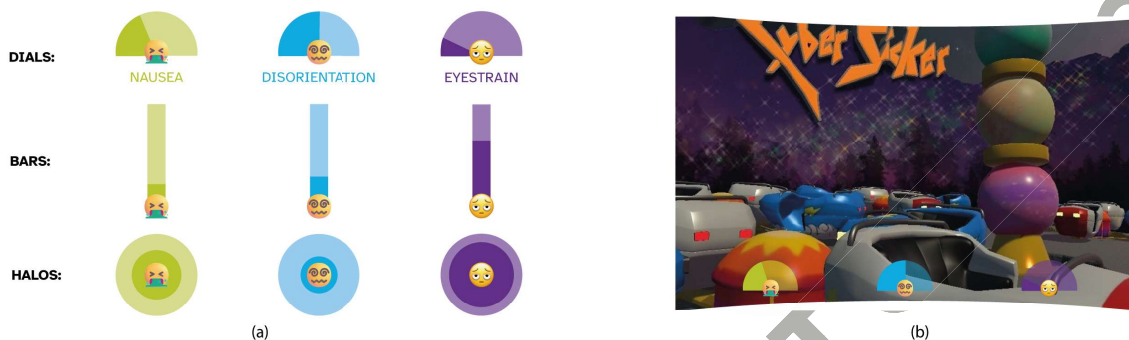


Figure 1: (a) Overview of the three interface prototypes designed and evaluated in this study, shown in order of user preference (top-down). Each prototype consists of three elements representing each symptom dimension of VR sickness (nausea, disorientation, and oculomotor), and employs distinct colors selected to be intuitive and easily distinguishable. The labels shown at the bottom correspond to the on-demand wording reference displayed when a button is pressed. (b) The preferred continuous interface implemented in the VR sickness-inducing scene chosen for the study [56].

Abstract

Precise measurements of sickness symptoms induced during a virtual reality (VR) experience are essential for evaluating VR systems and developing designs oriented toward usability, safety and user acceptance. However, VR sickness assessment typically relies either on discrete self-report questionnaires (which lack temporal resolution, interrupt the experience, thus reducing immersion, and provide coarse snapshots of symptom evolution) or on objective signals obtained with biosensors, which typically require extensive post-processing and interpretation. To address these shortcomings, we propose a continuous interface for real-time self-reporting of VR sickness, designed following a human-centered methodology. We design and evaluate three interface prototypes that allow users to report symptom intensity while remaining fully immersed in the virtual scene. Our findings demonstrate that users significantly prefer the continuous nature of our interfaces over the discrete Likert Scales of traditional questionnaires, identifying them as a more intuitive and less cognitively demanding alternative. In addition,

*Both authors contributed equally to this research.



This work is licensed under a Creative Commons Attribution 4.0 International License.
CHI EA '26, Barcelona, Spain

© 2026 Copyright held by the owner/author(s).

ACM ISBN 979-8-4007-2281-3/2026/04

<https://doi.org/10.1145/3772363.3798515>

the study allows us to identify the most suitable design according to user-centered criteria. Our contribution is an empirically evaluated continuous interface for real-time VR sickness assessment.

CCS Concepts

• Human-centered computing → Interaction design; Interactive systems and tools.

Keywords

Virtual Reality sickness, questionnaire, continuous real-time self-report, interface, CSQ-VR, Human Centered Design

ACM Reference Format:

Maria Plaza, Carmen Real, Ana Serrano, and Diego Gutierrez. 2026. Design and evaluation of a continuous interface for real-time self-reporting of VR sickness. In *Extended Abstracts of the 2026 CHI Conference on Human Factors in Computing Systems (CHI EA '26)*, April 13–17, 2026, Barcelona, Spain. ACM, New York, NY, USA, 6 pages. <https://doi.org/10.1145/3772363.3798515>

1 Introduction

Virtual Reality (VR) is increasingly used across entertainment, education, training, healthcare, and industry, gradually becoming part of everyday life. However, this growth is confronted with a significant challenge: adverse health effects resulting from immersive systems, often referred to as “cybersickness.” The phenomenon is described using other terms: motion sickness, simulator sickness, or

Virtual Reality Induced Symptoms and Effects (VRISE) [11]. These are related but not identical, differing mainly in their causes. Because our work addresses the broad issue of sickness experienced during VR immersion, without restricting its specific origin, we use the general term *VR sickness* throughout this paper [24].

Although extensive research has explored the origins of VR sickness and developed numerous techniques to mitigate it [5], far fewer innovations have emerged in how it is measured. Existing approaches can be broadly classified into objective and subjective methods [9]. Objective methods have lately expanded due to recent advances in biosensors (e.g., Galvanic Skin Response, heart rate, eye tracking), yet these signals are costly, technically demanding, and difficult to interpret in real time. Conversely, subjective assessments remain dominated by questionnaires and scales. These address the three dimensions of VR sickness into which symptoms are typically clustered: nausea (for symptoms related to stomach awareness, increased salivation, burping), disorientation (for symptoms related to dizziness, vertigo), and oculomotor (for symptoms related to eyestrain, difficulty focusing, blurred vision, headache) [14, 25, 29]. Questionnaires and scales are usually applied before and after the VR experience, thus failing to capture the temporal evolution of the symptoms. Alternatively, they may also be applied halfway through, requiring the users to take out their head-mounted displays (HMD) thereby disrupting immersion. Real-time information of VR sickness could support not only retrospective evaluation of experience designs, but also the development of user-centered adaptive immersive systems in which scenes respond dynamically to the users' current symptoms. This gap highlights the need for immersive self-report tools capable of monitoring symptoms continuously throughout the VR session.

Recent research has proposed embedding questionnaires or scales directly inside the VR environment [29, 36, 40], developing tools that facilitate less intrusive and more frequent data collection [26, 31, 41, 49]. However, these approaches either still rely on discrete measures, or fail to capture all three dimensions of VR sickness and therefore, do not provide a comprehensive method for continuous self-report of VR sickness during immersion.

Continuous self-reporting, on the other hand, offers the possibility of a more intuitive and cognitively less demanding interaction with a graphical interface [47], and has been explored in other areas of Human-Computer Interaction (HCI). Existing methods can be classified into four types: "**Linear models**", which encode intensity along a single axis, typically using a bar-like representation [4, 13, 16, 19, 49]; "**Circle models**", where the diameter of a circle or halo reflects the magnitude of the signal [50–53, 55]; "**Rotary models**" which feature rotary or angular indicators reminiscent of kitchen knobs or automotive speedometers, and are often operated via dial style controllers [1, 10, 30]; and "**Quadrant-based models**", which map data onto a two-dimensional Cartesian plane, typically representing arousal and valence [2, 12, 18, 20, 32, 43–46, 48, 54].

In this work, we investigate the question of how to design a continuous interface for real-time self-reporting of VR sickness, comparable with current validated questionnaires but without disrupting immersion. Inspired by the approaches of other areas in HCI and following a user-centered design methodology [17, 34, 42], we developed three design principles (see Section 2) that served as heuristics to narrow down the design space and guide us to

design three different interface prototypes. This allows us to validate the feasibility of continuous VR sickness self-reporting, while also identifying which of the three designs works best according to user-centered evaluation criteria. Our findings show that users significantly prefer the fluid nature of our continuous real-time reporting over discrete alternatives, finding it more intuitive and less cognitively demanding, while also reducing disruption.

2 Design Principles

We take into account three main design principles, which will guide the placement, behavior, and feedback logic of our interface.

P1. Design for a good VR experience. Rebelo et al. [38] defined the *i3* VR user-experience triangle: immersion, interaction, and imagination. Regarding *immersion*, and since our interface will be used inside the VR environment, it must remain visible without becoming distracting. To support *interaction*, all its elements must offer a comfortable, predictable, and consistent behavior, maintaining a unified logic to reduce cognitive effort and prevent errors. Last, to support *imagination*, the interface should add as little mental workload as possible, so that users can direct their attentional resources and engagement towards the virtual environment itself.

P2. Design for Universal Access and Human-Centered Interaction guidelines. Our interface should follow established Human-Centered Interaction guidelines, for which we turn to Jerald's book on Human-Centered Design for Virtual Reality [24]. It should also follow Norman's foundational usability principles [33]. Together, these guidelines allow us to enable universal access, comfortable even under varying levels of VR sickness. The specific visual, functional, and interaction decisions informed by these principles are detailed in the following sections.

P3. Design for a ground truth. Lastly, the effectiveness of our interface must be comparable to well-established VR sickness questionnaires, without breaking immersion. The Simulator Sickness Questionnaire (SSQ) [25] has been widely used in VR research. However, it was developed as an adaptation of the earlier Motion Sickness Questionnaire (MSQ) [37], and does not entirely match the phenomenology of VR-induced symptoms [39]. In response to these limitations, instead, the shorter Cybersickness in VR Questionnaire (CSQ-VR) (based on 7-point Likert Scale) was explicitly developed and validated within immersive VR contexts [15, 28, 29]. We thus select CSQ-VR as ground-truth questionnaire to evaluate our proposal.

Conclusion. Based on these principles, we narrow down the design space of our interface by focusing on three of the four types identified in the Introduction: Linear, Circle, and Rotary models. We discard the fourth option, Quadrant-based models, since VR sickness does not map meaningfully onto two-axis spaces.

3 Interface Adaptations

We make the following adaptations to the three remaining types of interfaces, to accommodate for the particular case of VR sickness.

Visual design. We design three interfaces, inspired by existing continuous self-reporting techniques: *Bars* (derived from Linear models and implemented as vertical bars), *Halos* (based on the Circle family), and *Dials* (a semicircular gauge implemented as an adaptation of the Rotary model). Each prototype consists of three

distinct elements, allowing users to independently report the three symptom dimensions of VR sickness: nausea, disorientation, and oculomotor. These interfaces are shown in Fig. 1(a).

Semantic layer. By default, no textual labels are displayed; instead, we assign a distinct icon to convey each symptom, minimizing visual load and supporting rapid recognition [1, 6, 7, 46, 48, 50]. When needed, users can activate an on-demand wording reference by pressing a button, temporarily showing a brief label describing each of the three symptom dimensions. We use Atkinsons Hyperlegible, a typeface recommended by the Braille Institute for visually impaired users [35].

Visual encoding. We assign a discriminable color to each symptom [22], chosen to remain distinguishable even under color-blindness conditions (HEX values: yellow-green #A2C523 for nausea; soft blue #3FA7D6 for disorientation; violet #6A1B9A for oculomotor). We use low-saturation tones, subtle shadows, and controlled transparency to reduce visual fatigue and support divided attention, allowing the interface to remain perceptible without competing with the virtual scene [21].

Functional design. All interface elements are head locked within the ergonomic field of view, positioned in a lower centered location for constant visibility. Interaction is performed via the HMD controller: users point at a symptom element, select it using the trigger, and adjust the intensity using the joystick (chosen for its return spring mechanisms, which allow users to sense the neutral position without visual confirmation, again reducing cognitive load [2, 39]). Interface feedback includes audiovisual cues: a brief sound plus white highlight when hovering, red highlight during selection via the trigger.

4 Evaluating the design

Prior to the formal study, we conducted several feedback pilot rounds with three HCI researchers. The formal study was reviewed by our institute's regional ethics committee. The within-subjects design involved three sessions on separate days, one for each interface design in random order, to mitigate potential memory issues. Before participation, all individuals reviewed and signed the informed consent form and received instructions about the study's objectives and procedure. The study was divided in three phases: Questionnaires; VR experience; and Feedback. In the first phase, participants completed an online questionnaire collecting demographics, their past experience with immersive environments, as well as the Visually Induced Motion Sickness Susceptibility Questionnaire (VIMSSQ) [27] to assess their predisposition to sickness and their current state. Next, participants sat in a non-rotating chair with armrests, since studies indicate that standing induces more VR sickness compared to a seated posture [3, 57], and received instructions on how to put on and calibrate the Varjo XR-4 HMD and controller. At the beginning of the second phase, participants spent the first five minutes in a training scene, designed to help them familiarize with VR, learn how to interact with the interface, and understand the three VR symptom dimensions and their mapping to the on-demand wording reference (see supplementary material S.1 for a description of the training scene). After that, the actual test begins. Participants were asked to annotate their symptoms using the given interface while immersed in the Cybersicker

amusement ride scene (see Fig. 1 (b)), which was selected because it was specifically designed to study induced effects of VR sickness [56]. This lasted ten minutes, since cybersickness symptoms are typically noticed within this timeframe [11, 23]. We modified the motion speed and acceleration of the scene to elicit varying levels of discomfort and capture dynamic symptom fluctuations (see S.2 of the supplementary material for a description of the speed modification in the scene). All scene parameters, together with the user's current symptoms intensities, are continuously logged to enable the subsequent evaluation of the three interfaces designs. To minimize external factors, no music was played during this phase [28]. Participants verbally answered the CSQ-VR at the beginning, middle and at the end of the experience [49], but without removing the HMD or introducing additional on-screen interaction. They could stop the experiment at any time.

Once the experience was over, the HMD and controller were taken off, and participants completed the third phase by answering the System Usability Scale (SUS) [8] for both the interface used and the 7-point Likert Scale CSQ-VR, followed by a brief, semi-structured interview to collect qualitative feedback and identify potential interface improvements. In total, the duration was approximately 45 minutes on day one, and 25 minutes on days two and three, since less training was required. After testing the three interfaces, participants ranked them during the interview.

4.1 Results

We evaluate the proposed interfaces according to three main objectives:

O1. Ground truth agreement: Assessing whether continuous interfaces are comparable to the CSQ-VR questionnaire used as ground truth. **O2. Temporal sensitivity:** Examining if the proposed interfaces capture the continuous evolution of symptoms better than discrete traditional questionnaires. **O3. User experience comparison:** Identifying which of the three designs (Bars, Halos or Dials) achieves better usability, acceptance, and comfort.

A total of 25 participants (average age = 27.12, M = 15, F = 10) took part. Of these, 56% reported frequent prior use of VR, 40% reported limited prior experience (less than 5 uses), and 4% reported no prior VR exposure. One participant had cochlear implants due to hearing impairment, and two participants reported color-blindness. We analyze data collected from the CSQ-VR questionnaire, the continuous interface, and the interviews to evaluate the proposed designs.

O1. Ground truth agreement. To evaluate the accuracy of VR sickness estimates provided by our interfaces, we computed the mean absolute error (MAE) between interface-based measurements and the scores obtained from the standardized CSQ-VR, administered at three discrete time points. Fig. 2 (left) summarizes MAE results across the three interfaces (MAE values range from 0 to 1, with lower values indicating closer agreement with the reference measure). Normality assumptions were mildly violated (Shapiro-Wilk test on within-subject residuals, $p = .024$); therefore, we report non-parametric analyses. A Friedman test ($\chi^2(2) = 3.44$, $p = .18$) did not reveal significant differences in MAE across interface conditions. Post-hoc pairwise comparisons confirmed the absence of meaningful differences between interfaces. Overall, all interface conditions

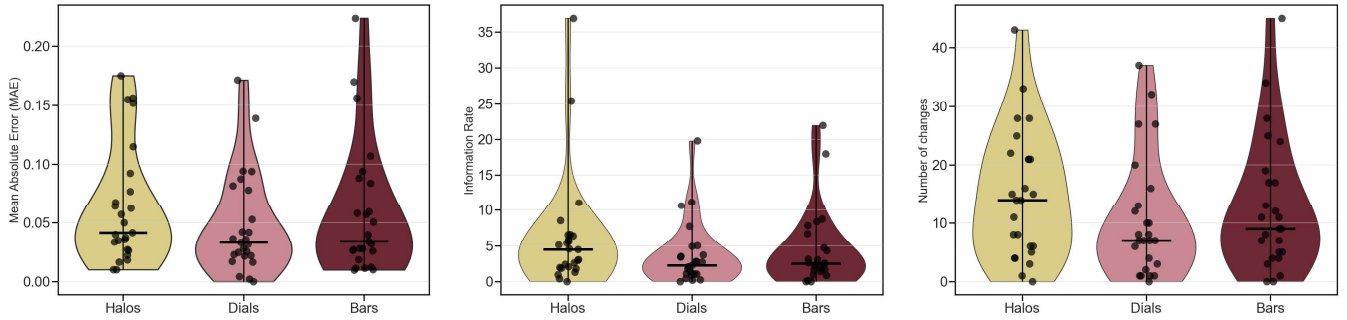


Figure 2: Distribution of the Mean Absolute Error of the proposed interfaces with respect to the CSQ-VR questionnaire (left), Information Rate (center), and the detected Number of changes (right). Horizontal lines denote the median, and dots correspond to individual participants. All interfaces show comparable performance across metrics, with no statistically significant differences between them. MAE values indicate comparable agreement with the CSQ-VR across interfaces. Both Information Rate and Number of changes are substantially higher for the interactive interfaces than for the CSQ-VR baseline ($IR \approx 10^{-4}$ and at most two changes, as the questionnaire is administered three times), reflecting their ability to capture continuous user input.

yielded low estimation errors, confirming good agreement with the standardized questionnaire.

02. Temporal sensitivity. To characterize how efficiently participants conveyed information through the proposed interfaces, we computed the Information Rate (IR), which measures the amount of information conveyed per unit time. It is computed as the sum of changes in the reported signal across consecutive samples, normalized by the total elapsed time between samples. Higher IR values indicate more frequent and/or larger user adjustments (more efficient information transmission). In addition to IR, we also quantified the Number of changes in the signal (i.e., adjustments exceeding a threshold) during the task, as a more direct measure of how often participants updated the interface.

Fig. 2 shows IR (center) and the Number of changes (right) across interface conditions. Normality was strongly violated for both IR and Number of changes (Shapiro–Wilk tests on within-subject residuals, $p < 0.001$ and $p = 0.004$, respectively), motivating a non-parametric analysis. Friedman tests did not reveal a statistically significant effect of interface condition for either metric (IR: $\chi^2(2) = 3.29$, $p = 0.19$; Number of changes: $\chi^2(2) = 3.48$, $p = 0.18$). While uncorrected post-hoc comparisons suggested trend-level differences (IR: Halos vs. Bars, $p = 0.075$; Number of changes: Halos vs. Dials, $p = 0.049$), none of these effects survived Holm correction for multiple comparisons. Notably, the IR associated with the standardized questionnaire (on the order of 2×10^{-4}) was substantially lower than that of all interface conditions, and the questionnaire can yield at most two detectable changes. This is expected, as the questionnaire captures user input at only three discrete points in time, whereas the interactive interfaces enable continuous information transmission throughout the task (see Fig. 3).

03. User experience comparison. SUS questionnaire results indicate that the Bars interface achieved the highest usability score, followed by Dials, while CSQ-VR received the lowest rating (Bars=90.4; Dials=88.8; Halos=86.1; CSQ-VR=74.5). Interestingly, ranking data obtained from the interviews identified the Dials interface as the

participants’ favorite (Dials=63; Bars=50; Halos=37). Finally, comfort ratings on a 7-point Likert scale followed the same trend, favoring Dials and Bars over the Halos interface. This confirms the preference of continuous interfaces over discrete questionnaires.

5 Conclusions and limitations

Our work is a step towards the development of continuous real-time tools for assessing immersive sickness during VR experiences, without introducing disruption. Our quantitative analyses show that all of our three interactive interfaces achieve comparable performance in terms of estimation accuracy and information transmission, offering similarly reliable and efficient sickness measurements, with all of them being superior to commonly-used standard questionnaires.

Together with the subjective reports (see the qualitative feedback from semi-structured interviews in S.4 of supplementary material), our results indicate that the Dials interface offers the best overall balance between usability, comfort, and user preference, with Bars representing a close alternative. Moreover, participants further reported that interaction with interface did not disrupt their sense of presence or immersion and was perceived as less intrusive than interrupting the experience to complete questionnaires. The standardized questionnaire, by contrast, was consistently rated lower and exhibited substantially lower information rates. This supports our hypothesis that continuous real-time self-report enables richer characterization of symptom dynamics (see Fig. 3) than discrete questionnaire-based assessments, which are inherently limited to sparse time points.

Our work is not free from limitations; as with other similar studies, a more diverse set of scenes should be analyzed, to study how well our conclusions generalize. For these analyses, our work does provide a tested methodology. Future work could also include other immersive techniques such as AR or MR. Moreover, we have recorded physiological measurements (e.g. Galvanic Skin Response, eye tracking, head movement), which we plan to analyze to complement subjective assessments and explore objective-subjective relationships as well as investigate potential temporal lag between symptom recognition and reporting.

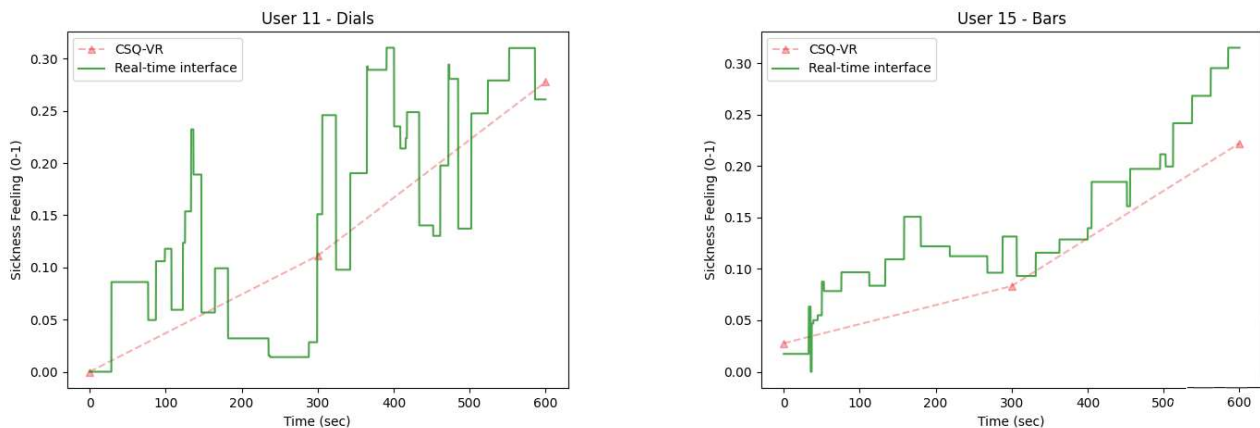


Figure 3: Two representative examples of individual time-series showing VR sickness intensity over time recorded with the continuous interface (green) and the CSQ-VR questionnaire (red). The VR sickness estimates of both distributions greatly differ when they do not overlap, corroborating the ability of the continuous interfaces to capture substantially more temporal variation of VR sickness than the CSQ-VR, which only provides sparse measurements at discrete time points. Whenever they overlap, both estimates show the similar tendency, supporting the comparability of the interfaces with the standardized questionnaire. Additional examples are provided in S.3 in the supplementary material.

In summary, real-time monitoring of sickness may unlock a particularly promising research direction: the adaptation of the stimulus intensity (such as speed or acceleration in a VR scene) based on real-time symptom reports, with the goal of providing a more pleasant experience adapted to each particular user. In addition, we hope that our work helps other researchers, providing a tested means to collect detailed temporal characterization of VR sickness while providing new opportunities for evaluating and designing safer and more comfortable immersive experiences.

Acknowledgments

This work was supported by the Government of Aragon's Departamento de Educación, Ciencia y Universidades through the project HUMAN-VR: Development of a Computational Model for Virtual Reality Perception (*PROY_T25_24*); by grant PID2022-141539NB-I00, funded by MICIU/AEI/10.13039/501100011033 and by ERDF, EU; and funded by the European Union (ERC grant number 101220555, PROXIE). Views and opinions expressed are however those of the author(s) only and do not necessarily reflect those of the European Union or the European Research Council Executive Agency. Neither the European Union nor the granting authority can be held responsible for them.

References

- [1] Md Istiak Jaman Ami, Jason W. Woodworth, and Christoph W. Borst. 2024. Design of Time-Continuous Rating Interfaces for Collecting Empathic Responses in VR, and Initial Evaluation with VR180 Video Viewing. In *Proceedings of the IEEE Conference on Virtual Reality and 3D User Interfaces Abstracts and Workshops*. Institute of Electrical and Electronics Engineers Inc., Orlando, FL, USA, 1041–1042. doi:10.1109/VRW62533.2024.00317
- [2] Jossin Antony, Karan Sharma, Claudio Castellini, Egon L. Van Den Broek, and Christoph Borst. 2014. Continuous affect state annotation using a joystick-based user interface. In *Measuring Behaviour*. Noldus Information Technology, Wageningen, The Netherlands, 525–530. doi:10.13140/2.1.2507.3929
- [3] Benjamin Arcioni, Stephen Palmisano, Deborah Apthorp, and Juno Kim. 2019. Postural stability predicts the likelihood of cybersickness in active HMD-based virtual reality. *Displays* 58 (2019), 3–11. doi:10.1016/j.displa.2018.07.001 Special Issue: Visually Induced Motion Sensations.
- [4] Alberto Betella and Paul F. M. J. Verschure. 2016. The affective slider: A digital self-assessment scale for the measurement of human emotions. *PLoS ONE* 11 (February 2016), 1–11. Issue 2. doi:10.1371/journal.pone.0148037
- [5] Nilotpal Biswas, Anamitra Mukherjee, and Samit Bhattacharya. 2024. "Are you feeling sick?" - A systematic literature review of cybersickness in virtual reality. *Comput. Surveys* 56, 11 (November 2024), 1–38. doi:10.1145/3670008
- [6] Joost Broekens and Willem Paul Brinkman. 2009. Affectbutton: Towards a standard for dynamic affective user feedback. In *2009 3rd international conference on affective computing and intelligent interaction and workshops*. IEEE, Amsterdam, Netherlands, 1–8.
- [7] Joost Broekens and Willem Paul Brinkman. 2013. AffectButton: A method for reliable and valid affective self-report. *International Journal of Human Computer Studies* 71 (2013), 641–667. Issue 6. doi:10.1016/j.ijhcs.2013.02.003
- [8] John Brooke. 1996. SUS - A quick and dirty usability scale. *Usability evaluation in industry* 189, 194 (1996), 4–7.
- [9] Eunhee Chang, Hyun Taek Kim, and Byoungyun Yoo. 2020. Virtual Reality Sickness: A Review of Causes and Measurements. *International Journal of Human-Computer Interaction* 36, 17 (October 2020), 1658–1682. doi:10.1080/10447318.2020.1778351
- [10] Andrea Clerico, Cindy Chamberland, Mark Parent, Pierre-Emmanuel Michon, Sebastien Tremblay, and Tiago H. Falk. 2016. Biometrics and classifier fusion to predict the fun-factor in video gaming. In *2016 IEEE Conference on Computational Intelligence and Games (CIG)*. IEEE, Santorini, Greece, 1–8.
- [11] Sue V. G. Cobb, Sarah Nichols, Amanda Ramsey, and John R. Wilson. 1999. Virtual reality-induced symptoms and effects (VRISE). *Presence* 8, 2 (April 1999), 169–186. doi:10.1162/105474699566152
- [12] Roddy Cowie, Ellen Douglas-Cowie, Susie Savvidou, Edelle McMahon, Martin Sawey, and Marc Schröder. 2000. Feeltrace: An instrument for recording perceived emotion in real time. In *Proceedings of the ISCA Workshop on Speech and Emotion*, Vol. 1. ISCA, Newcastle, Northern Ireland, UK, 19–24.
- [13] Roddy Cowie, Martin Sawey, Cian Doherty, Javier Jaimovich, Cavan Fyans, and Paul Stapleton. 2013. Gtrace: General trace program compatible with emotionml. In *2013 Humaine Association Conference on Affective Computing and Intelligent Interaction*. IEEE, Geneva, Switzerland, 709–710.
- [14] Simon Davis, Keith Nesbitt, and Eugene Nalivaiko. 2014. A systematic review of cybersickness. In *Proceedings of the 2014 conference on interactive entertainment*. Association for Computing Machinery, New York, US, 1–9.
- [15] Luis Eudave and Martín Martínez. 2025. To VR or not to VR: Assessing cybersickness in navigational tasks at different levels of immersion. *Frontiers in Virtual Reality* 6 (2025), 13 pages. doi:10.3389/frvir.2025.1518735
- [16] Kirill Fayn, Steven Willemssen, R. Muralikrishnan, Bilquis Castaño Manias, Winfried Menninghaus, and Wolff Schlotz. 2022. Full throttle: Demonstrating the speed, accuracy, and validity of a new method for continuous two-dimensional

- self-report and annotation. *Behavior Research Methods* 54 (2022), 350–364. doi:10.3758/s13428-021-01616-3/Published
- [17] International Organization for Standardization. 2019. ISO 9241-210:2019 Ergonomics of human-system interaction – Part 210: Human-centred design for interactive systems. International Standard.
- [18] Antonin Fourcade, Francesca Malandrone, Lucy Roellecke, Anthony Ciston, Jeroen de Mooij, Arno Villringer, Sara Carletto, and Michael Gaebler. 2025. AffectTracker: real-time continuous rating of affective experience in immersive virtual reality. *Frontiers in Virtual Reality* 6 (2025), 73 pages. doi:10.3389/frvir.2025.1567854
- [19] Jeffrey M. Girard. 2014. CARMA: Software for continuous affect rating and media annotation. *Journal of Open Research Software* 2, 1 (2014), e5.
- [20] Jeffrey M. Girard and Aidan G. C. Wright. 2018. DARMA: Software for dual axis rating and media annotation. *Behavior research methods* 50, 3 (2018), 902–909.
- [21] Beverly L. Harrison, Kim J. Vicente, and William A. S. Buxton. 1995. Transparent Layered User Interfaces: An Evaluation of a Display Design to Enhance Focused and Divided Attention. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*. ACM Press/Addison-Wesley Publishing Co., Denver, Colorado, USA, 317–324. doi:10.1145/223904.223945
- [22] Eva Heller. 2012. *Psicología del color: cómo actúan los colores sobre los sentimientos y la razón*. Editorial GG, Barcelona, Spain.
- [23] Angelica Jasper, Nicholas Cone, Chase Meusel, Michael Curtis, Michael C. Dornich, and Stephen B. Gilbert. 2020. Visually induced motion sickness susceptibility and recovery based on four mitigation techniques. *Frontiers in Virtual Reality* 1 (2020), 16 pages. doi:10.3389/frvir.2020.582108
- [24] Jason Jerald. 2015. *The VR book: Human-centered design for virtual reality*. Morgan & Claypool, San Rafael, US.
- [25] Robert S. Kennedy, Norman E. Lane, Kevin S. Berbaum, and Michael G. Lilienthal. 1993. Simulator Sickness Questionnaire: An Enhanced Method for Quantifying Simulator Sickness. *The International Journal of Aviation Psychology* 3 (1993), 203–220. Issue 3. doi:10.1207/s15327108ijap0303_3
- [26] Behrang Keshavarz and Heiko Hecht. 2011. Validating an Efficient Method to Quantify Motion Sickness. *Human Factors* 53, 4 (2011), 415–426. doi:10.1177/0018720811403736 PMID: 21901938.
- [27] Behrang Keshavarz, Brandy Murovec, Niroshica Mohanathas, and John Golding. 2021. The Visually Induced Motion Sickness Susceptibility Questionnaire (VIMSSQ): Estimating Individual Susceptibility to Motion Sickness-Like Symptoms When Using Visual Devices. *Human Factors: The Journal of the Human Factors and Ergonomics Society* 65 (April 2021), 1 pages. doi:10.1177/00187208211008687
- [28] Panagiotis Kourtesis, Rayaan Amir, Josie Linnell, Ferran Argelaguet, and Sarah E. MacPherson. 2023. Cybersickness, Cognition, & Motor Skills: The Effects of Music, Gender, and Gaming Experience. *IEEE Transactions on Visualization and Computer Graphics* 29 (5 2023), 2326–2336. Issue 5. doi:10.1109/TVCG.2023.3247062
- [29] Panagiotis Kourtesis, Josie Linnell, Rayaan Amir, Ferran Argelaguet, and Sarah E. MacPherson. 2023. Cybersickness in virtual reality questionnaire (CSQ-VR): A validation and comparison against SSQ and VRSQ. *Virtual Worlds* 2, 1 (2023), 16–35. doi:10.3390/virtualworlds2010002
- [30] Phil Lopes, Georgios N. Yannakakis, and Antonios Liapis. 2017. Ranktrace: Relative and unbounded affect annotation. In *2017 Seventh International Conference on Affective Computing and Intelligent Interaction (ACII)*. IEEE, Institute of Electrical and Electronics Engineers Inc., San Antonio, USA, 158–163.
- [31] Natalie McHugh, Sungchul Jung, Simon Hoermann, and Robert W. Lindeman. 2019. Investigating a Physical Dial as a Measurement Tool for Cybersickness in Virtual Reality. In *Proceedings of the 25th ACM Symposium on Virtual Reality Software and Technology (Parramatta, NSW, Australia) (VRST '19)*. Association for Computing Machinery, New York, NY, USA, Article 32, 5 pages. doi:10.1145/3359996.3364259
- [32] Frederik Nagel, Reinhard Kopiez, Oliver Grewe, and Eckart Altenmüller. 2007. EMuJoy: Software for continuous measurement of perceived emotions in music. *Behavior Research Methods* 39, 2 (2007), 283–290.
- [33] Don Norman. 2013. *The design of everyday things: Revised and expanded edition*. Basic books, London, UK.
- [34] Donald A. Norman. 2013. *The Design of Everyday Things* (revised and expanded ed.). Basic Books, New York, US.
- [35] Braille Institute of America. 2019. Atkinson Hyperlegible Typeface. <https://brailleinstitute.org/freetfont>.
- [36] Susanne Putze, Dmitry Alexandrovsky, Felix Putze, Sebastian Höffner, Jan David Smeddinck, and Rainer Malaka. 2020. Breaking the experience: Effects of questionnaires in VR user studies. In *Proceedings of the 2020 CHI Conference on Human Factors in Computing Systems*. Association for Computing Machinery, Honolulu, US, 1–15.
- [37] James T. Reason and Joseph John Brand. 1975. *Motion sickness*. Academic press, London; New York.
- [38] Francisco Rebelo, Paulo Noriega, Emilia Duarte, and Marcelo Soares. 2012. Using virtual reality to assess user experience. *Human Factors* 54 (12 2012), 964–982. Issue 6. doi:10.1177/0018720812465006
- [39] Lisa Rebenitsch and Charles Owen. 2016. Review on cybersickness in applications and visual displays. *Virtual Reality* 20, 2 (June 2016), 101–125. doi:10.1007/s10055-016-0285-9
- [40] Georg Regal, Jan-Niklas Voigt-Antons, Steven Schmidt, Johann Schrammel, Tanja Kojić, Manfred Tscheligi, and Sebastian Möller. 2019. Questionnaires embedded in virtual environments: reliability and positioning of rating scales in virtual environments. *Quality and User Experience* 4, 1 (2019), 5.
- [41] Rose Rouhani. 2024. *Trackling VR sickness: A novel benchmark system for assessing contributor*. Ph.D. Dissertation. Simon Fraser University School of Interactive Arts and Technology Faculty of Communication, Art and Technology.
- [42] Elizabeth Salinas, Rony Cueva, and Freddy Paz. 2020. A systematic review of user-centered design techniques. In *International Conference on Human-Computer Interaction*. Springer, Springer-Verlag, Copenhagen, Denmark, 253–267. doi:10.1007/978-3-030-49713-2_18
- [43] Emery Schubert. 1999. Measuring emotion continuously: Validity and reliability of the two-dimensional emotion-space. *Australian Journal of Psychology* 51 (1999), 154–165. Issue 3. doi:10.1080/00049539908255353
- [44] Karan Sharma, Claudio Castellini, Freek Stulp, and Egon L. Van Den Broek. 2020. Continuous, Real-Time Emotion Annotation: A Novel Joystick-Based Analysis Framework. *IEEE Transactions on Affective Computing* 11 (1 2020), 78–84. Issue 1. doi:10.1109/TAFFC.2017.2772882
- [45] Catherine Stevens, Kim Vincs, and Emery Schubert. 2009. Measuring audience response on-line: An evaluation of the portable audience response facility (pARF). In *Second International Conference on Music Communication Science*. HCSNet, Sydney, Australia, 4 pages.
- [46] Alexander Toet, Fabienne Heijn, Anne Marie Brouwer, Tina Mioch, and Jan B.F. van Erp. 2020. An Immersive Self-Report Tool for the Affective Appraisal of 360° VR Videos. *Frontiers in Virtual Reality* 1 (9 2020), 16 pages. doi:10.3389/frvir.2020.552587
- [47] Alexander Toet, Fabienne Heijn, Anne-Marie Brouwer, Tina Mioch, and Jan B. F. van Erp. 2020. An immersive self-report tool for the affective appraisal of 360° VR videos. *Frontiers in Virtual Reality* 1 (2020), 552587.
- [48] Alexander Toet, Daisuke Kaneko, Shota Ushima, Sofie Hoving, Inge de Kruijf, Anne Marie Brouwer, Victor Kallen, and Jan B.F. van Erp. 2018. EmojiGrid: A 2D pictorial scale for the assessment of food elicited emotions. *Frontiers in Psychology* 9 (November 2018), 21 pages. doi:10.3389/fpsyg.2018.02396
- [49] Elliott Wen, Tharindu Indrajith Kaluarachchi, Shamane Siriwardhana, Vanessa Tang, Mark Billinghurst, Robert W. Lindeman, Richard Yao, James Lin, and Suranga Nanayakkara. 2022. VRhook: A Data Collection Tool for VR Motion Sickness Research. In *Proceedings of the 35th Annual ACM Symposium on User Interface Software and Technology*. Association for Computing Machinery, Inc, Bend, US, 9 pages. doi:10.1145/3526113.3545656
- [50] Jason W. Woodworth and Christoph W. Borst. 2024. Study of Interfaces for Time-Continuous Emotion Reporting and the Relationship Between Interface and Reported Emotion. In *Proceedings of the IEEE International Symposium on Mixed and Augmented Reality (ISMAR)*. Institute of Electrical and Electronics Engineers Inc., Bellevue, USA, 884–892. doi:10.1109/ISMAR62088.2024.00104
- [51] Tong Xue, Abdallah El Ali, and Tianyi Zhang. 2021. Rcea-360vr: Real-time, continuous emotion annotation in 360 VR videos for collecting precise viewport-dependent ground truth labels. In *Proceedings of the Conference on Human Factors in Computing Systems*. Association for Computing Machinery, Yokohama, Japan, 15 pages. doi:10.1145/3411764.3445487
- [52] Tong Xue, Abdallah El Ali, Tianyi Zhang, Gangyi Ding, and Pablo Cesar. 2021. CEAP-360VR: A Continuous Physiological and Behavioral Emotion Annotation Dataset for 360° VR Videos. *IEEE Transactions on Multimedia* 25 (2021), 243–255.
- [53] Tong Xue, Surjya Ghosh, Gangyi Ding, Abdallah El Ali, and Pablo Cesar. 2020. Designing real-time, continuous emotion annotation techniques for 360° VR videos. In *Proceedings of the Conference on Human Factors in Computing Systems*. Association for Computing Machinery, Honolulu, US, 1–9. doi:10.1145/3334480.3382895
- [54] Georgios N. Yannakakis and Hector P. Martinez. 2015. Grounding truth via ordinal annotation. In *2015 international conference on affective computing and intelligent interaction (ACII)*. IEEE, IEEE Computer Society, Xi'an, China, 574–580.
- [55] Tianyi Zhang, Abdallah El Ali, Chen Wang, Alan Hanjalic, and Pablo Cesar. 2020. RCEA: Real-time, Continuous Emotion Annotation for Collecting Precise Mobile Video Ground Truth Labels. In *Proceedings of the Conference on Human Factors in Computing Systems*. Association for Computing Machinery, Honolulu, US, 1–15. doi:10.1145/3313831.3376808
- [56] Daniel Zielasko and Yuen C. Law. 2024. Cybersicker: An Open Source VR Sickness Testbed - Do you still have fun, or are you already sick?. In *Proceedings of the ACM Symposium on Virtual Reality Software and Technology*. VRST. Association for Computing Machinery, Christchurch, New Zealand, 2 pages. doi:10.1145/3641825.3689503
- [57] Daniel Zielasko and Bernhard E. Riecke. 2021. To sit or not to sit in VR: Analyzing influences and (dis)advantages of posture and embodied interaction. *Computers* 10, 6 (2021), 73.